



FEATURES

- Atom D2550/J1900/4200U Processor
- 4GB DDR3 1066/1333/1600MHz SODIMM 204 Socket
- USB 2.0 x 2, USB 3.0 x 2, HDMI x 1
- DB-9 For RS232 x 6 (COM1 & COM2 Support RS232/422/485)
- 10/100/1000Base, RJ 45 x 2
- DC_IN 9~28V
- Windows 7/8/10, Linux


SPECIFICATIONS

SYSTEM	
Processor	Atom D2550/J1900/4200U Processor
System Memory	4GB DDR3 1066/1333/1600MHz SODIMM 204 Socket
Ethernet	10/100/1000Base, RJ 45 x 2
I/O Port	USB 2.0 x 2, USB 3.0 x 2 DB-9 For RS232 x 6 (COM1 & COM2 Support RS232/422/485) Audio x 1 Power Input x 1 HDMI x 1 14 bit GPIO x 1
Storage Disk Drive	Support SATA 2.5" HDD/MSATA
Expansion Slot	PCI-Ex4 x 1
Operating System Support	Windows 7/8/10, Linux
LCD	
Display Type	17" TFT LED Backlight
Max. Resolution	1280x1024
Max. Colors	16M
Luminance	350cd/m2
Viewing Angle	160°(H), 160°(V)
Back Light MTBF (Hours)	50000
TOUCH SCREEN	
Type	Heat 5 wire analog resistive
Light Transmission	More Than 81%
Life Time	35 Million Times Click
POWER SUPPLY	
DC Input	DC_IN 9~28V
ENVIRONMENTAL	
Operating Temperature	-20°C ~ 60°C
Storage Temperature	-30°C ~ 80°C
Storage Humidity	10%~ 95% @ 40°C Relative Humidity, Non-condensing

MECHANICAL

Construction	The Shell Is Made Of Cast Aluminum Mold
Mounting	VESA / Panel Embedded Mount
Dimensions	392x300x85mm
Weight	7.2KG

DIMENSION (Unit: mm)

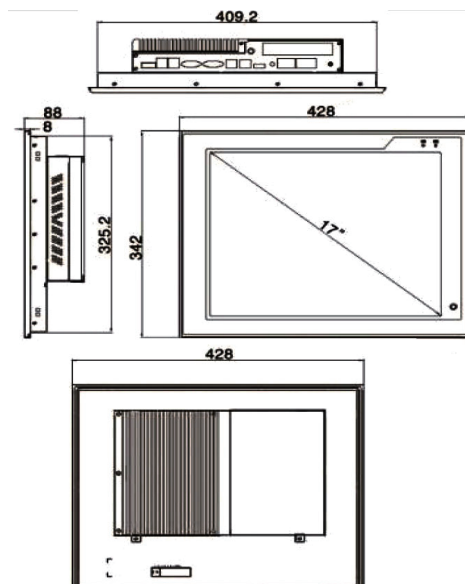

The Hole Size : 411 x 327 mm