



## FEATURES

- Atom N2600 dual-core 1.6 Hz Energy-saving Processor
- 2GB DDR3 1066MHz SDRAM
- USB 2.0 x 2
- DB-9 For RS232 x 3 And RS232/485 x 1
- 10/100/1000Base, RJ 45 x 2
- DC\_IN 12V(Optional 6~30V)
- Support mSATA

## SPECIFICATIONS

SYSTEM	
Processor	Atom N2600 Dual-core 1.6 Hz Energy-saving
System Memory	2GB DDR3 1066MHz SDRAM
Ethernet	10/100/1000Base, RJ 45 x 2
I/O Port	USB 2.0 x 2 DB-9 For RS232 x 3 And RS232/485 x 1 VGA x 1 LINE-out x 1 Power Input x 1
Storage Disk Drive	Support mSATA
Expansion Slot	-
Operating System Support	Windows 2000/ XP/ VISTA/ 7, Linux

### LCD

Display Type	12.1" TFT LED backlight
Max Resolution	1024x768
Max. Colors	16M
Luminance	350cd/m2
Viewing Angle	160°(H), 160°(V)
Back Light MTBF (Hours)	50000

### TOUCH SCREEN

Type	Heat 4 wire analog resistive
Light Transmission	More Than 81%
Life Time	35 Million Times Click

### POWER SUPPLY

DC Input	DC_IN 12V(Optional 6~30V)
----------	---------------------------


### ENVIRONMENTAL

Operating Temperature	0°C ~ 50°C
Storage Temperature	-20°C ~ 60°C
Storage Humidity	10%~ 95%@40°C Relative Humidity, Non-condensing

## MECHANICAL

Construction	Panel With Aluminum-magnesium Alloy Processing Molding, The Entire Surface Of Shell Use Aluminum-magnesium Alloy To Processing, To Make Overall Cooling
Mounting	VESA / Panel Embedded Mount
Dimensions	321x252x52mm
Weight	4KG

## DIMENSION ( Unit: mm )

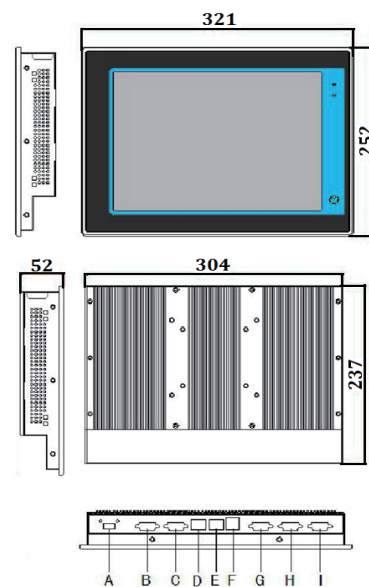

A-----Power Input    F-----USB1/2  
 B-----VGA                G-----COM2  
 C-----COM1              H-----COM3  
 D-----RJ45                I-----COM4  
 E-----RJ45