



FEATURES

- Atom N2600 Dual-core 1.6 Hz Energy-saving Processor (3 w), FSB 533 MHZ
- 2GB DDR3 1066MHz SDRAM
- USB 2.0 x 2
- RS232 x 1, RS232 / 485x 1
- 10/100/1000Base, RJ 45 x2
- 12V DC(Optional 6-30V)
- Support Windows XP, Windows 7, Linux/Embedded

SPECIFICATIONS

SYSTEM	
Processor	Atom N2600 Dual-core 1.6 Hz Energy-saving Processor (3 w), FSB 533 MHZ
System Memory	2GB DDR3 1066MHz SDRAM
Ethernet	10/100/1000Base, RJ 45 x 2
I/O Port	USB 2.0 x 2 RS232 x 1, RS232/485x 1 VGA x 1 Power Input x 1
Storage Disk Drive	Support SATA 2.5"SSD, HDD, DOM Card
Expansion Slot	-
Operating System Support	Windows XP, Windows 7, Linux/Embedded

LCD

Display Type	7"VGA TFT LED Backlight
Max Resolution	800x480
Max. Colors	16M
Luminance	350cd/m2
Viewing Angle	(H) 160/(V) 160
Back Light MTBF (Hours)	50000

TOUCH SCREEN

Type	Heat 5 Wire Analog Resistive
Light Transmission	More Than 81%
Life Time	35 Million Times Click

POWER SUPPLY

DC Input	12V DC(Optional 6-30V)
----------	------------------------



ENVIRONMENTAL

Operating Temperature	0°C ~ 50°C
Storage Temperature	-20°C ~ 60°C
Storage Humidity	10% ~ 95% Relative Humidity, Non-condensing

MECHANICAL

Construction	Panel With Aluminum-magnesium Alloy Processing Molding, The Shell Use Sheet Metal Structure
Mounting	VESA / Panel Embedded Mount
Dimensions	218x150x51mm
Weight	1.8 kg

DIMENSION (Unit: mm)

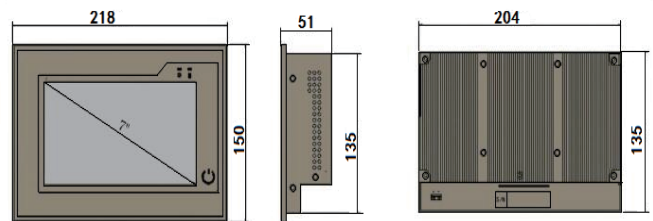

- A-----Power Input
- B-----VGA
- C-----COM1 RS232
- D-----LAN 1
- E-----LAN 2
- F-----USB 1/2
- G-----COM 2 RS232